

[THE NAME OF DOCUMENT] PATENT APPLICATION

[REFERENCE NUMBER] 62509021

[DESTINATION] DIRECTOR-GENERAL PATENT OFFICE

[IPC CLASSIFICATION] H04N 7/26

[INVENTOR]

[ADDRESS] c/o NEC Corporation, 7-1, Shiba 5-
chome, Minato-ku, Tokyo, Japan

[NAME] Junichiro SHIBATA

[APPLICANT]

[DISCRIMINATION NUMBER] 000004237

[NAME] NEC Corporation

[AGENT]

[DISCRIMINATION NUMBER] 100093595

[PATENT ATTORNEY]

[NAME] Masao MATSUMOTO

[OFFICIAL FEE]

[HOW TO PAY] PREPAYMENT

[NUMBER OF PREPAYMENT LEDGER] 057794

[AMOUNT OF PAYMENT] 21000

[THE LIST OF FILING OBJECT]

[THE NAME OF OBJECT] Specification 1

[THE NAME OF OBJECT] Drawing 1

[THE NAME OF OBJECT] Abstract 1

[THE NUMBER OF GENERAL POWER OF ATTORNEY]

9303563

[NEEDS OF PROOF] NEED

[THE NAME OF DOCUMENT] SPECIFICATION
[TITLE OF THE INVENTION] PORTABLE TERMINAL
[CLAIM]

[CLAIM 1] A portable terminal formed by connecting a main unit and a flip unit having a monitor screen by a rotatable axial unit, comprising:

a first photographic lens housed in the axial unit in the longitudinal direction; and

a second photographic lens provided at a predetermined position on the flip unit.

[CLAIM 2] A portable terminal formed by connecting a main unit and a flip unit having a monitor screen by a rotatable axial unit, comprising:

a first photographic lens in the vicinity of the axial unit; and

a second photographic lens provided at a predetermined position on the flip unit.

[CLAIM 3] A portable terminal as set forth in Claim 1 or Claim 2, in which

the flip unit has said second photographic lens on the side of the monitor screen, and

the axial unit has a structure of closing both the units making inside surface of the main unit into contact with inside surface of the flip unit.

[CLAIM 4] A portable terminal as set forth in Claim 3, further comprising:

an axial unit state sensor for detecting angle or positional relationship of the flip unit and the main unit, according to the angle of a movable portion of the axial unit; and

a means for selecting and executing each function predetermined based on the angle or relationship of the flip unit and the main unit detected by said axial unit state sensor, from various usable functions provided in the portable terminal.

[CLAIM 5] A portable terminal as set forth in Claim 4, further comprising:

a microphone on the inside of the main unit;

a speaker on the inside of the flip unit;

a communication unit for sound communication; and

a means for putting a communication function through a wireless communication line into an executable state, when the inside surface of the main unit and the inside surface of the flip unit are opened in the same direction.

[CLAIM 6] A portable terminal as set forth in Claim 4 or Claim 5, further comprising:

a microphone on one surface of the main unit;

a speaker on the outside of the flip unit;

a communication unit for sound communication; and

a means for putting a communication function through a wireless communication line into an executable state, when the surface having said microphone on the main

unit and the outside surface of the flip unit are opened in the same direction.

[CLAIM 7] A portable terminal as set forth in Claim 5 or Claim 6, further comprising:

a speaker on the inside of the flip unit;

said communication unit including a communication means of an image; and

a means for putting a communication function of a TV telephone through a wireless communication line into an executable state, when the surface having said microphone on the main unit and the inside surface of the flip unit are opened in the same direction.

[CLAIM 8] A portable terminal as set forth in one of Claim 4 to Claim 7, further comprising:

an information processing unit for processing input information and instruction;

the monitor screen that is a monitor with a touch panel; and

a means for putting a function of an information terminal for processing the input information and instruction upon receipt of the input from the touch panel, into an executable state, when the outside surface of the flip unit and one surface of the main unit are closed in contact with each other.

[CLAIM 9] A portable terminal as set forth in one of Claim 5 to Claim 8, further comprising:

a storing means for storing electronic data;

a means for converting a static image taken by said first photographic lens and said second photographic lens into electronic data; and

a means for putting a photographic function as a digital camera into an executable state, when the main unit and the flip unit are opened so as to direct said first photographic lens and said second photographic lens in an inverse direction.

[CLAIM 10] A portable terminal as set forth in Claim 9, further comprising:

a means for converting a moving image taken by said first photographic lens and said second photographic lens into electronic data; and

a means for putting a photographic function as a digital video camera into an executable state, when the main unit and the flip unit are opened so as to direct said first photographic lens and said second photographic lens in an inverse direction.

[CLAIM 11] A portable terminal as set forth in one of Claim 5 to Claim 10, further comprising:

a means for stopping a predetermined function to be finished, of the functions under activation, after judging that the function is in unused state, when the inside surface of the main unit and the inside surface of the flip unit are closed in contact with each other.

[CLAIM 12] A portable terminal as set forth in one of Claim 1 to Claim 11, further comprising:

a storing means for storing electronic data.

[CLAIM 13] A portable terminal as set forth in Claim 12, further comprising:

a means for converting a static image taken by said first photographic lens and said second photographic lens into electronic data,

the portable terminal storing the taken static image in said storing means as a digital video camera.

[CLAIM 14] A portable terminal as set forth in Claim 13, further comprising:

a means for converting a moving image taken by said first photographic lens and said second photographic lens into electronic data,

the portable terminal storing the taken moving image in said storing means as a digital video camera.

[CLAIM 15] A portable terminal as set forth in one of Claim 1 to Claim 14, further comprising:

a communication unit for image and sound communication; and

a means for transmitting images taken by said first photographic lens and said second photographic lens through said communication unit.

[CLAIM 16] A portable terminal as set forth in Claim 15, further comprising:

the main unit is provided with said microphone,

the flip unit is provided with said speaker, and

communication through a wireless communication line is performed by said communication unit.

[CLAIM 17] A portable terminal as set forth in Claim 16, further comprising:

a means for displaying the image received by said communication unit on the monitor screen, reproducing the sound received by said communication unit through said speaker, and transmitting the image taken by said first photographic lens and said second photographic lens and the sound supplied to said microphone, to a communication party, in which

communication by a TV telephone is performed by said communication unit.

[CLAIM 18] A portable terminal as set forth in one of Claim 1 to Claim 17, further comprising:

an information processing unit for processing input information and instruction;

the monitor screen that is a monitor with a touch panel; and

a means for receiving input from the touch panel and processing the input information and instruction.

[CLAIM 19] A portable terminal as set forth in Claim 18, wherein

input with an input pen on the monitor screen that is the touch panel monitor is accepted.

[CLAIM 20] A portable terminal as set forth in one of Claim 1 to Claim 19, further comprising:

an operation button for specifying the type of an image to be displayed on the monitor screen, to a control unit, in which

the type of an image to be displayed on the monitor screen is switched according to the specification by said operation button.

[CLAIM 21] A portable terminal as set forth in Claim 20, further comprising:

a means for displaying an image taken by said first photographic lens on the monitor screen;

a means for displaying an image taken by said second photographic lens on the monitor screen; and

a means for displaying the image taken by said first photographic lens and the image taken by said second photographic lens simultaneously on the monitor screen at predetermined respective portions, in which

the type of an image to be displayed on the monitor screen is switched according to the specification by said operation button.

[CLAIM 22] A portable terminal as set forth in one of Claim 1 to Claim 21, further comprising:

an input/output unit for performing communication by electric signals through connection to an outward information device, in which

bidirectional data transfer is performed with the outward information device through said input/output unit.

[CLAIM 23] A portable terminal as set forth in one of Claim 1 to Claim 22, further comprising:

a sound input/output terminal for sending and receiving a sound signal.

[CLAIM 24] A portable terminal as set forth in one of Claim 1 to Claim 23, wherein

the axial unit connects a central portion of one side of the flip unit to a central portion of one side of the main unit in a movable way, and

includes an opening/shutting axis for connecting both the flip unit and the main unit in a way of freely opening and closing around the connected one side, and

a rotation axis for connecting the flip unit in a way of freely rotating across around said opening/shutting axis.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[FIELD OF THE INVENTION]

The present invention relates to a portable terminal, and more particularly to a small-sized portable terminal for compactly realizing various functions of a telephone, a TV telephone, a digital camera, a digital video camera, a pen input terminal and the like.

[0002]

[PRIOR ART]

A portable terminal is a small-sized device having a processing function of communication, image and information, convenient to carry and excellent in portability.

[0003]

As the conventional portable terminal widely used in the public, there are communication terminals and information terminals of, for example, a portable telephone, a PHS, a TV telephone, a digital camera, a digital video camera, and a pen input system.

[0004]

Recently, a portable terminal provided with some of these functions has made an appearance. In this method, since some functions are provided in one device, it is not necessary to carry several kinds of portable terminals and the portability that is the aim of a portable terminal is improved.

[0005]

Further, since many units and functions are commonly required in a plurality of portable terminals, when a plurality of functions are provided in one terminal, the common units can be shared and the terminal can be provided with a plurality of functions without losing the characteristic of a light and small portable terminal.

[0006]

Thus, if a portable terminal provided with a plurality of functions is compared with the method of having individual portable terminals of various functions, it is effective in decreasing the power consumption with superiority in the maintenance and portability, and further decreasing the manufacturing cost and the purchase price since the common unit can be shared.

[0007]

As an example of the conventional portable terminal with a plurality of functions, there is a technique disclosed in Japanese Patent Publication Laid-Open (Kokai) No. Heisei 06-292195, where a portable terminal, provided with a liquid crystal monitor, a CCD camera, a speaker and a communication function, for realizing functions of a portable telephone and a portable TV telephone is proposed.

[0008]

A portable TV telephone by the conventional portable terminal including a portable terminal of the Japanese Patent Publication Laid-Open (Kokai) No. Heisei 06-292195 generally adopts a form of setting a CCD camera adjacent to a liquid crystal monitor on the same surface of the liquid crystal monitor of the portable terminal.

[0009]

Thus, while a user watches a received image displayed on the liquid crystal monitor, the CCD camera set adjacent to the liquid crystal monitor can take an image of the own face to send the same image to a communication party, thereby realizing a function of a portable TV telephone.

[0010]

Further, a lot of the conventional portable terminals, including the portable terminal of the Japanese Patent Publication Laid-Open (Kokai) No. Heisei 06-292195, adopt a method of providing with a flip unit of the same area as (or a little less than) that of the main unit itself of the portable terminal and connecting both the flip unit and the main unit by a movable axial unit in a

way of opening and shutting like a shell. In this case, since the main unit of the portable terminal is supported by hand, generally operation buttons are mainly provided on the main unit and a liquid crystal monitor is provided on the flip unit.

[0011]

In this form, when the flip unit and the main unit are closed, there is a space in no contact with the outward, inside both the units, where the liquid crystal monitor and various operation buttons can be disposed. Therefore, by closing it in compact at a time of no use, it is possible to prevent damage to the liquid crystal monitor and a malfunction of the operation buttons, thereby realizing excellent portability.

[0012]

[PROBLEMS TO BE SOLVED BY THE INVENTION]

The conventional portable terminal as mentioned above has the following problems.

[0013]

First, though there are a lot of advantages in adopting the method of providing one portable terminal with a plurality of functions such as a telephone, a TV telephone, a digital camera, a digital video camera, a pen input terminal and the like, the conventional portable terminal can combine only two or three functions. Especially, it is impossible to realize a portable terminal capable of combining all the above-mentioned functions.

[0014]

This is because if a plurality of functions are provided within one small and light portable terminal, the circuitry and structure of a device becomes too complicated and the operational performance is too deteriorated to solve faults.

[0015]

Second, though a use of sending various images such as scenes and substances from a visiting place is required as a function of a portable TV telephone, making good use of the portability of the portable terminal, a portable TV telephone by the conventional portable terminal is very inconvenient for picking up an image other than a user's own face.

[0016]

This is because only one CCD camera is provided adjacent to a liquid crystal monitor on the same surface of the liquid crystal monitor of the main unit in the conventional portable terminal. In order to pick up an image other than a user's own face such as a scene nearby, it is necessary to change the direction of a photographic lens.

[0017]

If the direction is changed, a user cannot see the display on the liquid crystal monitor. Since the focus of the above-mentioned CCD camera is set at a position near the lens suitable for picking up a face image, in order to pick up a scene nearby, a liquid monitor is necessarily referred to, so as to adjust the focus of the lens.

[0018]

Third, in the above-mentioned conventional portable terminal where a flip unit is connected to a main unit in a movable way, the main unit and the flip unit are desired to be directed toward the suitable direction for executing various functions, in executing various functions of the portable terminal such as a telephone, a TV telephone, a digital camera, a digital video camera, a pen input terminal and the like. The conventional portable terminal, however, can operate only in a way of opening and closing the flip unit and the main unit, and it cannot be adjusted in the other directions flexibly.

[0019]

In order to solve the above conventional problems, a first object of the present invention is to provide a portable terminal having a portable TV telephone, a digital video camera, and a digital still camera, without damaging the portability. Further, it is to provide a portable terminal provided with a touch panel capable of writing with a pen, and provided with full functions as for the data communication as well as the TV telephone.

[0020]

In order to solve the above conventional problems, a second object of the present invention is to provide a portable terminal provided with a function of a portable TV telephone capable of easily sending an image such as a scene nearby seen from the side of a user, to a communication party.

[0021]

In order to solve the above conventional problems, a third object of the present invention is to provide a

portable terminal capable of changing the direction of main unit and the flip unit to the suitable direction for executing the respective functions flexibly.

[0022]

[MEANS TO SOLVE THE PROBLEM]

According to the invention recited in claim 1, a portable terminal formed by connecting a main unit and a flip unit having a monitor screen by a rotatable axial unit, comprises a first photographic lens housed in the axial unit in the longitudinal direction; and a second photographic lens provided at a predetermined position on the flip unit.

[0023]

According to the invention recited in claim 2, a portable terminal formed by connecting a main unit and a flip unit having a monitor screen by a rotatable axial unit, comprises a first photographic lens in the vicinity of the axial unit; and a second photographic lens provided at a predetermined position on the flip unit.

[0024]

According to the portable terminal of the invention recited in claim 3, the flip unit has said second photographic lens on the side of the monitor screen, and the axial unit has a structure of closing both the units making inside surface of the main unit into contact with inside surface of the flip unit.

[0025]

According to the invention recited in claim 4, the portable terminal further comprises an axial unit state sensor for detecting angle or positional relationship of

the flip unit and the main unit, according to the angle of a movable portion of the axial unit; and a means for selecting and executing each function predetermined based on the angle or relationship of the flip unit and the main unit detected by said axial unit state sensor, from various usable functions provided in the portable terminal.

[0026]

According to the invention recited in claim 5, the portable terminal further comprises a microphone on the inside of the main unit; a speaker on the inside of the flip unit; a communication unit for sound communication; and a means for putting a communication function through a wireless communication line into an executable state, when the inside surface of the main unit and the inside surface of the flip unit are opened in the same direction.

[0027]

According to the invention recited in claim 6, the portable terminal further comprises a microphone on one surface of the main unit; a speaker on the outside of the flip unit; a communication unit for sound communication; and a means for putting a communication function through a wireless communication line into an executable state, when the surface having said microphone on the main unit and the outside surface of the flip unit are opened in the same direction.

[0028]

According to the invention recited in claim 7, the portable terminal further comprises a speaker on the inside of the flip unit; said communication unit including a communication means of an image; and a means for putting a communication function of a TV telephone through a wireless

communication line into an executable state, when the surface having said microphone on the main unit and the inside surface of the flip unit are opened in the same direction.

[0029]

According to the invention recited in claim 8, the portable terminal further comprises an information processing unit for processing input information and instruction; the monitor screen that is a monitor with a touch panel; and a means for putting a function of an information terminal for processing the input information and instruction upon receipt of the input from the touch panel, into an executable state, when the outside surface of the flip unit and one surface of the main unit are closed in contact with each other.

[0030]

According to the invention recited in claim 9, the portable terminal further comprises a storing means for storing electronic data; a means for converting a static image taken by said first photographic lens and said second photographic lens into electronic data; and

a means for putting a photographic function as a digital camera into an executable state, when the main unit and the flip unit are opened so as to direct said first photographic lens and said second photographic lens in an inverse direction.

[0031]

According to the invention recited in claim 10, the portable terminal further comprises a means for converting a moving image taken by said first photographic lens and

said second photographic lens into electronic data; and a means for putting a photographic function as a digital video camera into an executable state, when the main unit and the flip unit are opened so as to direct said first photographic lens and said second photographic lens in an inverse direction.

[0032]

According to the invention recited in claim 11, the portable terminal further comprises a means for stopping a predetermined function to be finished, of the functions under activation, after judging that the function is in unused state, when the inside surface of the main unit and the inside surface of the flip unit are closed in contact with each other.

[0033]

According to the invention recited in claim 12, the portable terminal further comprises a storing means for storing electronic data.

[0034]

According to the invention recited in claim 13, the portable terminal further comprises a means for converting a static image taken by said first photographic lens and said second photographic lens into electronic data, the portable terminal storing the taken static image in said storing means as a digital video camera.

[0035]

According to the invention recited in claim 14, the portable terminal further comprises a means for converting a moving image taken by said first photographic lens and said second photographic lens into electronic data, the

portable terminal storing the taken moving image in said storing means as a digital video camera.

[0036]

According to the invention recited in claim 15, the portable terminal further comprises a communication unit for image and sound communication; and a means for transmitting images taken by said first photographic lens and said second photographic lens through said communication unit.

[0037]

According to the invention recited in claim 16, the portable terminal further comprises the main unit is provided with said microphone, the flip unit is provided with said speaker, and communication through a wireless communication line is performed by said communication unit.

[0038]

According to the invention recited in claim 17, the portable terminal further comprises a means for displaying the image received by said communication unit on the monitor screen, reproducing the sound received by said communication unit through said speaker, and transmitting the image taken by said first photographic lens and said second photographic lens and the sound supplied to said microphone, to a communication party, in which communication by a TV telephone is performed by said communication unit.

[0039]

According to the invention recited in claim 18, the portable terminal further comprises an information processing unit for processing input information and

instruction; the monitor screen that is a monitor with a touch panel; and a means for receiving input from the touch panel and processing the input information and instruction.

[0040]

According to the portable terminal of the invention recited in claim 19, input with an input pen on the monitor screen that is the touch panel monitor is accepted.

[0041]

According to the invention recited in claim 20, the portable terminal further comprises an operation button for specifying the type of an image to be displayed on the monitor screen, to a control unit, in which the type of an image to be displayed on the monitor screen is switched according to the specification by said operation button.

[0042]

According to the invention recited in claim 21, the portable terminal further comprises a means for displaying an image taken by said first photographic lens on the monitor screen; a means for displaying an image taken by said second photographic lens on the monitor screen; and a means for displaying the image taken by said first photographic lens and the image taken by said second photographic lens simultaneously on the monitor screen at predetermined respective portions, in which the type of an image to be displayed on the monitor screen is switched according to the specification by said operation button.

[0043]

According to the invention recited in claim 22, the portable terminal further comprises an input/output unit for performing communication by electric signals through

connection to an outward information device, in which bidirectional data transfer is performed with the outward information device through said input/output unit.

[0044]

According to the invention recited in claim 23, the portable terminal further comprises a sound input/output terminal for sending and receiving a sound signal.

[0045]

According to the portable terminal of the invention recited in claim 24, the axial unit connects a central portion of one side of the flip unit to a central portion of one side of the main unit in a movable way, and includes an opening/shutting axis for connecting both the flip unit and the main unit in a way of freely opening and closing around the connected one side, and a rotation axis for connecting the flip unit in a way of freely rotating across around said opening/shutting axis.

[0046]

[THE EMBODIED CONFIGURATION OF THE INVENTION]

The preferred embodied configuration of the present invention will be discussed hereinafter in detail with reference to the accompanying drawings.

[0047]

Figs. 1 to 12 are views each showing a main unit and a flip unit of a portable terminal according to a first embodied configuration of the present invention, which are put in various directions and seen from various directions.

[0048]

With reference to Figs. 1 to 12, in the portable terminal of the embodied configuration of the present invention, a main unit 10 and a flip unit 20 are connected

in a movable way through an axial unit 30.

[0049]

The axial unit 30 is provided with an opening/shutting axis 31 and a rotation axis 32 as illustrated in Fig. 1. The opening/shutting axis 31 is connected to the portable terminal so that the main unit and the flip unit can be relatively rotatable, and the rotation axis 32 is connected there in a rotatable way in the vertical direction across the rotation of the opening/shutting axis 31.

[0050]

Further, a first photographic lens 33 for a digital camera is provided on one end of the opening/shutting axis 31 and an operation dial 34 is provided on the other end thereof.

[0051]

The flip unit 20 is inside provided with a monitor with a touch panel 21, an operation button 22 for switching a screen, a second photographic lens 23 for a TV telephone and a speaker phone 24 as illustrated in Fig. 1.

[0052]

The main unit 10 of the terminal is inside provided with an operation key 17 for inputting a telephone number, a moving image/static image switch 16 for switching the kind of an image to be taken and a microphone 18 as illustrated in Fig. 9. Further it is provided with a strobe 14 and a button 13 for taking an image on one side thereof as illustrated in Fig. 2, and it is provided with a zoom button 11, a data input/output terminal 12-2, a dummy plug for data input/output terminal 12-3, and a sound input/output terminal 12-1 on the other side thereof as illustrated in Fig. 1.

[0053]

Further, the main unit 10 is provided with an input pen storing unit 19 for storing an input pen 40 used at a time of pen input.

[0054]

Fig. 13 is a block diagram showing the internal structure of the portable terminal of this embodied configuration.

[0055]

With reference to Fig. 13, the portable terminal of this embodied configuration comprises a first photographic lens 33, a second photographic lens 23, a monitor with a touch panel 21, a speaker 24, a microphone 18, an operation unit 52 for a user performing various operations, a storing unit 53 for storing the taken picture, a communication unit 54 for wireless communication, etc. and an axial unit state sensor 55 for examining the state of the axial unit 30 to detect the directions of the main unit 10 and the flip unit 20, which are respectively controlled by a control unit 51.

[0056]

The portable terminal of the embodied configuration performs various functions of a telephone, a TV telephone, a digital camera, a digital video camera, a pen input terminal and the like, by directing the main unit 10 and the flip unit 20 in the suitable direction for the respective functions.

[0057]

This time, an embodiment of using these functions of the portable terminal of the embodied configuration in the suitable directions of the main unit 10 and the flip unit 20 for the respective functions will be described in detail with reference to the drawings.

[0058]

Figs. 4 to 8 are views showing the state of folding the portable terminal of the embodied configuration when it is not used.

[0059]

When it is not used, the main unit 10 and the flip unit 20 are folded around the opening/shutting axis 31 as illustrated in Figs. 4 to 8. The touch panel monitor 21 of the flip unit 20 and the operation key 17 of the main unit 10 are thus closed inwardly, with no contact with the outside, thereby preventing damage to the touch panel monitor 21 and a malfunction of the operation key 17, with excellent portability.

[0060]

In the case of using it as a TV telephone, the main unit 10 and the flip unit 20 are opened to a position of turning them to an L-shape around the opening/shutting axis 31, and then, the flip unit 20 is turned across at 90° in the horizontal direction, as illustrated in Figs. 1, 2 and 3.

[0061]

A phone call is made by using the operation key 17 in the same way as the ordinal portable telephone. Conversation is made through the speaker phone 24. It is also possible to use the portable terminal by connecting a microphone or a headphone to the sound input/output terminal 12-1.

[0062]

It is possible to operate the operation button 22 at use so to variously switch a screen to be displayed on the touch panel monitor 21.

[0063]

The screen on the touch panel monitor 21 can show not only an image of a communication party transmitted through the communication of the TV telephone, but also an image of a user's own face taken by the second photographic lens 23 that is transmitted from the user's side to the communication party or an image of scene and substance around the user that is taken by the first photographic lens 33. Further a form of displaying the above images at once is possible.

[0064]

More specifically, three kinds of images; a communication party's image, a user's image and an image before the user's eyes may be switched variously, or combined.

[0065]

As a form of displaying them, there may be considered a first form of displaying one of these images on the whole screen of the touch panel monitor 21, a second form of displaying two of them on each half screen of the touch panel monitor 21, a third form of displaying these three images on each one-third screen of the touch panel monitor 21, and a fourth form of displaying one of them on the whole screen of the touch panel monitor 21 and further displaying the other (one or two of them) small with it overlapped on the screen as a child screen.

[0066]

In the fourth displaying form, the display position of the child screen may be decided in advance, or the display position and the size may be specified by the input pen 40 on the touch panel monitor 21 and after display, it can be changed to any desired position and size, or by the operation of the operation button 22, a desired one may be

selected and displayed from the predetermined setting of a plurality of display positions.

[0067]

Similarly to the selection of an image to be displayed on the touch panel monitor 21, an image to transmit to a communication party can be also selected variously by the operation of the above operation button 22.

[0068]

Although the TV telephone generally transmits a user's own face taken by the second photographic lens 23 to a communication party, the portable terminal of the present invention can switch the image to transmit to an image of the scene or substance before the user's eyes taken by the first photographic lens 33, or transmit the combined image, associated with or independently of the selection of the image to be displayed on the touch panel monitor 21.

[0069]

As mentioned above, since it is possible to transmit an image including the scene before a user's eyes as well as the user's face while switching the image at ease, the function of the TV telephone according to the portable terminal of the embodied configuration is very convenient for transmission of the scene at a visiting place or the like and it is to make the best use of the portability of a portable terminal.

[0070]

In the above-mentioned form, although the image of the scene before a user's eyes is transmitted, a form of transmitting only the user's face is possible. In this case, the main unit 10 and the flip unit 20 are only opened to a position of becoming a shape of L around the opening/shutting axis 31, with no need to rotate across the

flip unit 20 at 90 °in the horizontal direction.

[0071]

Next, in the case of using it as a digital video camera, it is preferable to use the main unit 10 and the flip unit 20 in the same direction as in the case of the above-mentioned TV telephone as shown in Figs. 1 to 3.

[0072]

A user sets the moving image/static image switch 16 shown in Fig. 9 for the moving image, thereby deciding on the moving image as for the kind of the image to be taken by the first photographic lens 33. The size of the image to be taken is adjusted by using the zoom button 11 with reference to the touch panel monitor 21. Press of the button 13 for taking an image starts taking and the moving image taken by the first photographic lens 33 is converted into electronic data and stored in the storing unit 53.

[0073]

The storing unit 53 stores the electronic data of the image into a built-in semiconductor memory, which can be read out and reproduced on the touch panel monitor 21 at any time. When the stored data is transmitted to an outside information processing terminal of a personal computer, the dummy plug for data input/output terminal 12-3 is extracted from the data input/output terminal 12-2 shown in Fig. 1 and instead of it, a connection cable is inserted therein. The other end of the connection cable is connected to the information processing terminal, thereby enabling data input/output.

[0074]

Also it is possible to take an image in the state of fixing the portable terminal to a tripod by use of a tripod fixing hole 15.

[0075]

Similarly, in the case of using it as a digital still camera, it is preferable to use the main unit 10 and the flip unit 20 in the same direction as in the above-mentioned TV telephone as shown in Figs. 1 to 3.

[0076]

A user sets the moving image/static image switch 16 shown in Fig. 9 for the static image, thereby deciding on the static image as for the kind of the image to be taken by the first photographic lens 33. The size of the image to be taken is adjusted by using the zoom button 11 with reference to the touch panel monitor 21. Press of the button 13 for taking an image starts taking and the static image taken by the first photographic lens 33 is converted into electronic data and stored in the storing unit 53.

[0077]

In this case, the button 13 for taking an image takes a role of a shutter and by using this button an image is taken. Thus taken image is stored in the storing unit 53 and it can be read out and reproduced any time.

[0078]

Also it is possible to take an image in the state of fixing the portable terminal to a tripod by use of a tripod fixing hole 15.

[0079]

In the case of using it as a pen input terminal, it is used in the state of closing the main unit 10 and the flip unit 20, making the inside surface of the main unit 10 into contact with the outside surface of the flip unit 20 as illustrated in Fig. 11. From the ordinary close state as shown in Fig. 10, once opening the main unit 10 and the flip unit 20 to any position around the opening/shutting

axis 31, only the flip unit 20 is rotated across around the rotation axis 32 at 180° in the horizontal direction and the flip unit 20 is again combined with the main unit 10 around the opening/shutting axis 31, to be shown in the state of Fig. 11.

[0080]

Thus, it becomes possible to input various data and instructions with the input pen 40 on the touch panel monitor 21 of the flip unit 20 as illustrated in Fig. 12. Since the portable terminal is closed small with the touch panel monitor 21 fixed outward, it is possible to support the portable terminal by the main unit 10 by hands so as not to wobble the touch panel monitor 21 at the input time with the input pen 40.

[0081]

Alternatively, it may be used in the state of closing the both, making the outside surface of the main unit 10 into contact with the outside surface of the flip unit 20. The main unit 10 and the flip unit 20 are opened around the opening/shutting axis 31 at 360° from the state as shown in Fig. 10, and then the outside of the main unit 10 is combined with the outside of the flip unit 20.

[0082]

In the case of using it as the ordinary portable telephone, the main unit 10 and the flip unit 20 are opened around the opening/shutting axis 31 to any position as illustrated in Fig. 9, thereby enabling the communication. A telephone number is input with the operation key 17 in the same way as in the case of the TV telephone, a voice is supplied through the microphone 18 and the received voice is reproduced by the speaker 24.

[0083]

As mentioned above, the portable terminal of the embodied configuration can realize a lot of functions of a telephone, a TV telephone, a digital camera, a digital video camera, a pen input terminal and the like, in compact.

[0084]

This time, a portable terminal according to a second embodied configuration of the present invention will be described.

[0085]

In the second embodied configuration, activation of various functions provided in the portable terminal of the present invention is controlled depending on the relative direction of the main unit 10 and the flip unit 20.

[0086]

When the relative direction of the main unit 10 and the flip unit 20 suitable for each function described in the first embodied configuration is detected by the axial unit state sensor 55, the corresponding function is activated or it is ready for activation.

[0087]

Fig. 14 is a flow chart for use in describing the control of the portable terminal of this embodied configuration.

[0088]

With reference to Fig. 14, the axial unit state sensor 55 detects the respective angles of the opening/shutting axis 31 and the rotation axis 32 of the axial unit 30 in order to recognize the relative direction of the main unit 10 and the flip unit 20 (Step 1401).

When the opening/shutting axis 31 is closed (Step 1402) and the rotation axis 32 has no rotation (namely, the flip unit 20 is directed to the front direction) (Step

1403), the axial unit state sensor 55 detects that the main unit 10 and the flip unit 20 are inwardly closed in an unused state at present (Step 1404). Because of the unused state, the processing of automatically cutting off the power supply is performed if necessary.

[0089]

When the opening/shutting axis 31 is closed (Step 1402) and the direction of the rotation axis 32 is rotated at 180°(namely, the flip unit is directed to the inverse direction) (Step 1403), the axial unit state sensor 55 detects that the both units are closed by making the inside of the main unit 10 face to face with the outside of the flip unit 20 in a state of using a function of pen input terminal (Step 1405).

[0090]

When the opening/shutting axis 31 is opened (Step 1402), the angle of the opening/shutting axis 31 is in the range of 90°to 180°, and the rotation axis 32 has no rotation (Step 1406), the sensor 55 detects that it is the case of using a telephone function (Step 1407).

[0091]

When the opening/shutting axis 31 is opened (Step 1402), the angle of the opening/shutting axis 31 is 90°, the rotation axis 32 is rotated at 90°, and the first photographic lens 33 and the second photographic lens 23 are directed in the inverse direction (Step 1408), it detects that it is the case of using one of the functions of a TV telephone, a digital video camera and a digital still camera (Step 1409). Which function is to be executed can be decided by a user's operation specifying it or a predetermined initial setting.

[0092]

When it is in none of the above cases (Step 1408), this step is returned to Step 1401, where the sensor 55 waits for the relative direction of the main unit 10 and the flip unit 20 to become the direction corresponding to one of the functions.

[0093]

When the current function to be used is recognized in Steps 1405, 1407, 1409 and the like, the corresponding function is activated or it is ready for activation if necessary in the case where the corresponding function is not yet activated. When the other function is under activation, the recognized function is activated, the function under activation is finished, and the switching processing for activating the newly recognized function can be performed.

[0094]

In addition to the effect of the first embodied configuration, the portable terminal of this embodied configuration as mentioned above can perform automatic activation of each function provided in the portable terminal, in accordance with the relative direction of the main unit 10 and the flip unit 20, thereby activating or switching various functions at ease.

[0095]

A portable terminal of a third embodied configuration of the present invention will be described.

[0096]

The portable terminal of the third embodied configuration of the present invention is different from the first embodied configuration and the second embodied configuration in that a second speaker 25 is provided on the opposite side of the speaker phone 24 in the flip unit

20 as illustrated in Figs. 15 and 16. Accordingly, in the case of using it as a portable telephone, it can be used with the outside of the flip unit facing to the inside of the main unit, by turning the flip unit 20 around the rotation axis 32 at 180°. In this case, a user's cheek doesn't come into contact with the touch panel monitor 21 when using it as the ordinal portable telephone, thereby enabling conversation without dirtying the surface of the monitor.

[0097]

A combination of the second embodied configuration and the third embodied configuration is enabled by replacing Step 1406 with the phrase "the angle of the opening/shutting axis is in the range of 90° to 180° and the rotation axis is inversely rotated at 180°".

[0098]

The other embodied configuration of the present invention will be described this time.

[0099]

A portable terminal provided with some of the functions or less than the functions; a telephone, a TV telephone, a digital camera, a digital video camera and a pen input terminal, as described in the above embodied configurations, is possible, other than the portable terminal provided with all the above-mentioned functions.

[0100]

Further, a portable terminal further provided with a receiving function of radio waves or TV waves, a beeper function, a navigation system such as a car navigation and the like is also possible. Also in the case of providing with these functions, a lot of units and functions can be used in common, thereby adding the functions efficiently.

[0101]

The storing unit 53 may be realized by a drive for storing data into a semiconductor memory or a magnetic memory that is a removable storing medium, instead of the form of using a built-in semiconductor memory as described in the above embodied configurations.

[0102]

In the case of using the built-in semiconductor memory in the storing unit 53, it is possible to perform data exchange to the outward information terminal by the infrared communication, other than the form of using the data input/output terminal 12-2 and the connection cable.

[0103]

Although the present invention has been described with respect to the preferred embodied configurations in the foregoing, the present invention is not necessarily limited to the above embodied configurations.

[0104]

[THE EFFECT OF THE INVENTION]

As set forth hereinabove, the present invention has the following excellent effects.

As a first effect, in the case of using the portable terminal as a TV telephone, it is possible to transmit a user's own face and the scene of the user's view to a communication party at ease and at once. This is because the portable terminal of the present invention is provided with two photographic lenses and a switch, thereby to transmit the images at an easy operation.

[0105]

As a second effect, it is possible to provide a portable terminal capable of various operations of a moving image, a static image, a character mail, a portable

telephone and the like. This is because it is provided with two rotation axes capable of setting any angle, thereby to cope with various uses.

[0106]

As a third effect, it is possible to transfer the taken image to an information processor such as a personal computer at ease or to transfer the image from the personal computer to the side of a portable terminal. This is because it is provided with a data input/output interface, thereby enabling connection to the other device at ease without passing through the storing medium such as a memory card.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[Fig. 1] Fig. 1 is a front view showing the case of using the functions of a video camera, a digital still camera and a TV telephone in a portable terminal according to a first embodied configuration of the present invention.

[Fig. 2] Fig. 2 is a rear elevation view of the portable terminal of Fig. 1 according to the first embodied configuration of the present invention.

[Fig. 3] Fig. 3 is a perspective view of the portable terminal of Fig. 1 according to the first embodied configuration of the present invention.

[Fig. 4] Fig. 4 is a front view from the side of a flip unit, showing the state of inwardly closing an operation key and a monitor with a touch panel of the portable terminal according to the first embodied configuration of the present invention.

[Fig. 5] Fig. 5 is a side elevation view from the side of a photographic lens, in the portable terminal of Fig. 4 according to the first embodied configuration of the present invention.

[Fig. 6] Fig. 6 is a bottom view of the portable terminal of Fig. 4 according to the first embodied configuration of the present invention.

[Fig. 7] Fig. 7 is a rear elevation view from the side of the main unit in the portable terminal of Fig. 4 according to the first embodied configuration of the present invention.

[Fig. 8] Fig. 8 is a plan view from the side of the top in the portable terminal of Fig. 4 according to the first embodied configuration of the present invention.

[Fig. 9] Fig. 9 is a front view showing the state of opening the operation key of the main unit and the monitor with a touch panel on the flip unit in the same direction, in the portable terminal according to the first embodied configuration of the present invention.

[Fig. 10] Fig. 10 is a perspective view showing the state of inwardly closing the operation key and the monitor with a touch panel in the portable terminal according to the first embodied configuration of the present invention.

[Fig. 11] Fig. 11 is a perspective view showing the state of inwardly closing the face of the operation key of the main unit and the face of the liquid crystal monitor of the flip unit, in the portable terminal according to the first embodied configuration of the present invention.

[Fig. 12] Fig. 12 is a front view showing the case of using a function of pen input, in the portable terminal according to the first embodied configuration of the present invention.

[Fig. 13] Fig. 13 is a block diagram showing the internal structure of the portable terminal according to the first embodied configuration of the present invention.

[Fig. 14] Fig. 14 is a flow chart for use in describing the processing of the portable terminal according to a second embodied configuration of the present invention.

[Fig. 15] Fig. 15 is a front view showing the state of opening the speaker of the flip unit and the operation key of the main unit in the same direction, in the portable terminal according to a third embodied configuration of the present invention.

[Fig. 16] Fig. 16 is a front view showing the case of using a function of a portable telephone, in the portable terminal according to the third embodied configuration of the present invention.

[THE DESCRIPTION OF THE NUMERALS]

- 10 main unit
- 11 zoom button
- 12-1 sound input/output terminal
- 12-2 data input/output terminal
- 12-3 dummy plug for data input/output terminal
- 13 button for taking an image
- 14 strobe
- 15 tripod fixing hole
- 16 moving image/static image switch

17	operation key
18	microphone
19	input pen storing unit
20	flip unit
21	touch panel monitor
22	operation button
23	second photographic lens
24	speaker
25	second speaker
30	axial unit
31	opening/shutting axis
32	rotation axis
33	first photographic lens
34	operation dial
40	input pen
51	control unit
52	operation unit
53	storing unit
54	communication unit
55	axial unit state sensor

[THE NAME OF DOCUMENT] ABSTRACT


[ABSTRACT]

[OBJECT] The present invention provides a portable terminal having a portable TV telephone, a digital video camera, and a digital still camera, without damaging the portability and makes it possible to transmit a user's own face and the scene of the user's view to a communication party at ease and at once.

[CONSTITUTION] The portable terminal comprises a main unit 10 and a flip unit 20. The main unit 10 includes a microphone 18, an operation key 17, a communication unit 54 for wireless communication of an image and a voice. The flip unit 20 includes an axial unit 30 having a photographic lens 33 and operation dial 34, a touch panel monitor 21 which displays a image taken by the photographic lens 33 and a screen for input operation and has a touch panel function, a second photographic lens 23, speaker 24 and operation button 22. The axial unit 30 is provided with an opening/shutting axis 31 and a rotation axis 32. The opening/shutting axis 31 is connected to the portable terminal so that the main unit and the flip unit can be relatively rotatable, and the rotation axis 32 is connected there in a rotatable way in the vertical direction across the rotation of the opening/shutting axis 31. The portable terminal functions as a video camera with a monitor, when the flip unit is opened and rotated in a transverse direction.


[SELECTED DRAWING] Fig. 1

【図1】 **FIG. 1**

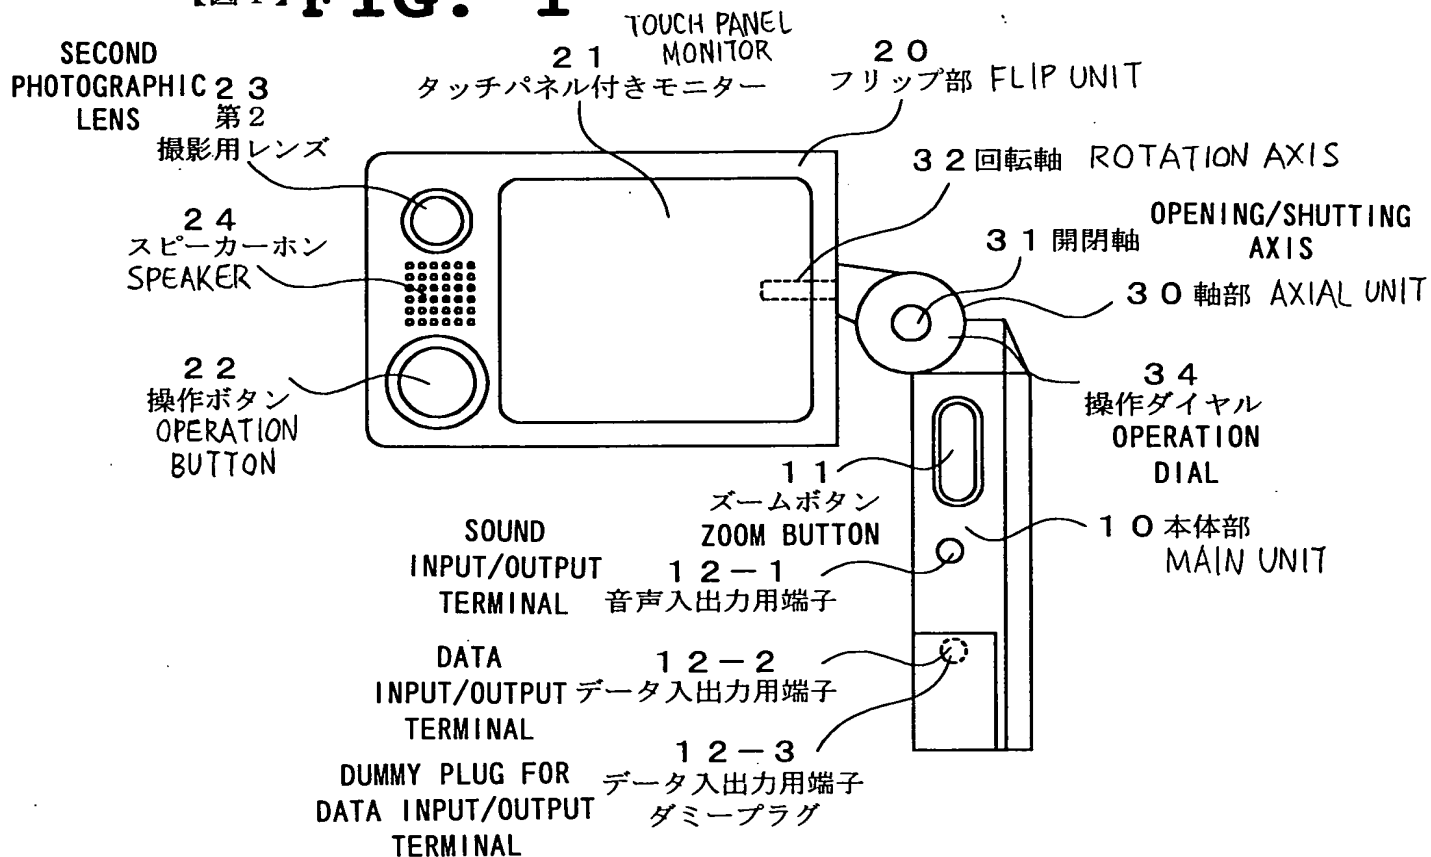

【図2】

FIG. 2

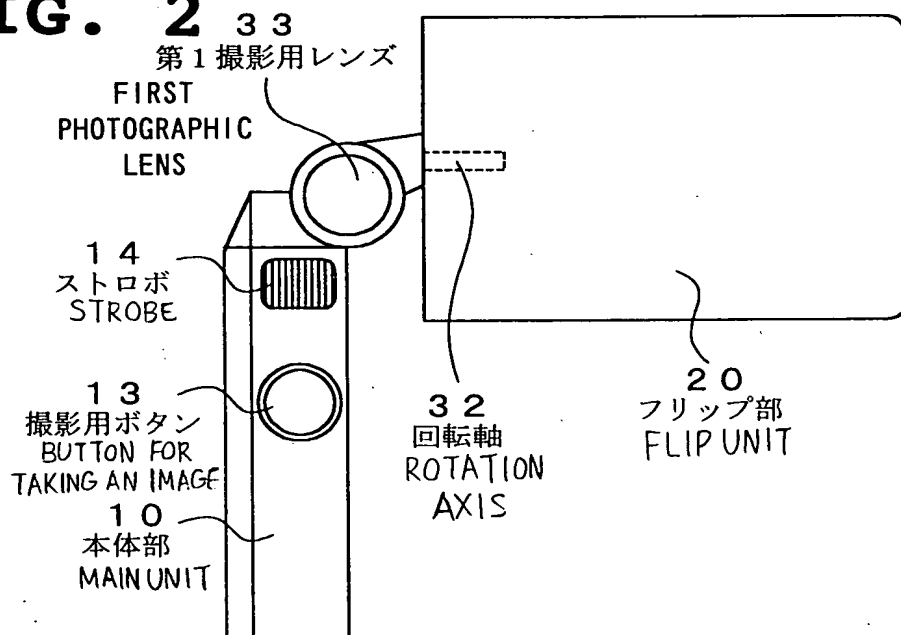

【図3】 FIG. 3

SECOND
PHOTOGRAPHIC
LENS

2 3
第2 撮影用
レンズ

2 4
スピーカ
ホン
SPEAKER

2 2
操作ボタン
OPERATION
BUTTON

2 1
TOUCH PANEL タッチパネル付き
MONITOR モニター

3 4
OPERATION 操作ダイヤル
DIAL

1 1
ズームボタン
ZOOM BUTTON

1 2 - 1
音声入出力用端子
SOUND
INPUT/OUTPUT
TERMINAL

2 0 フリップ部
FLIP UNIT

3 2
ROTATION AXIS
回転軸


3 1 開閉軸 OPENING/SHUTTING AXIS

3 3
第1 撮影用レンズ FIRST
PHOTOGRAPHIC
LENS


4 0
入力用ペン INPUT PEN

1 9
入力用ペン INPUT PEN
格納部 STORING UNIT


1 0
本体部
MAIN UNIT

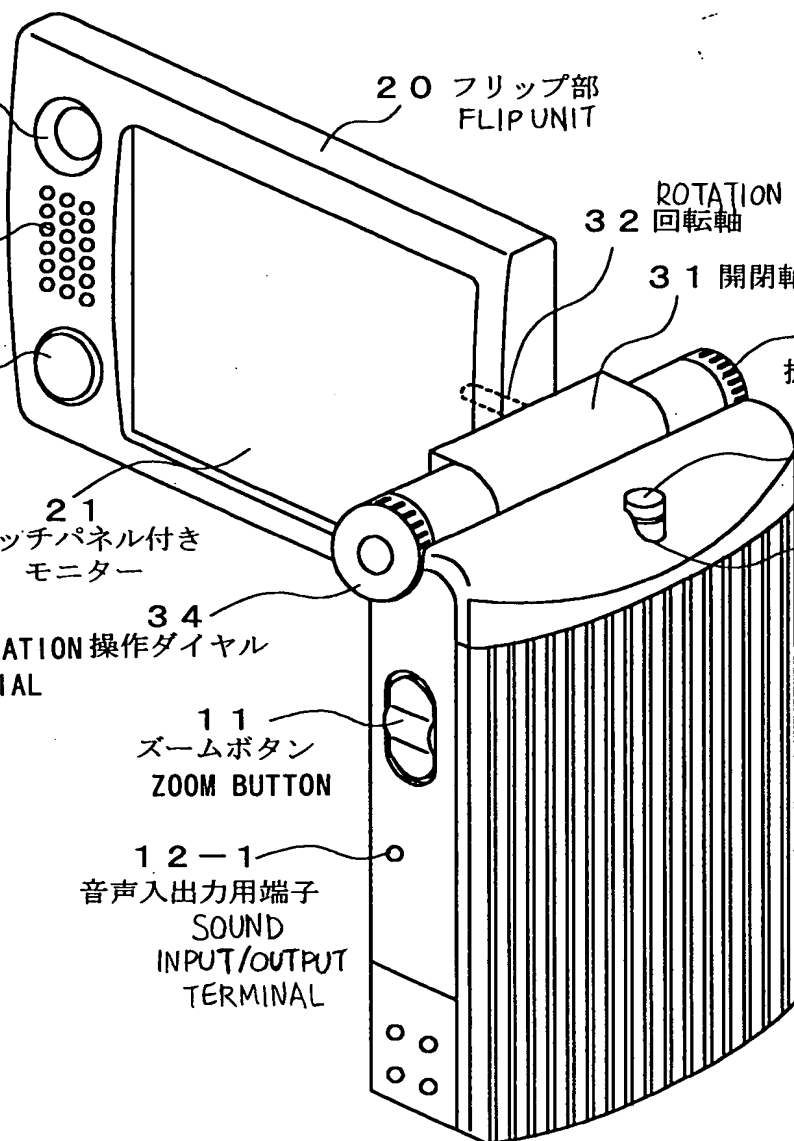


【図4】 FIG. 4

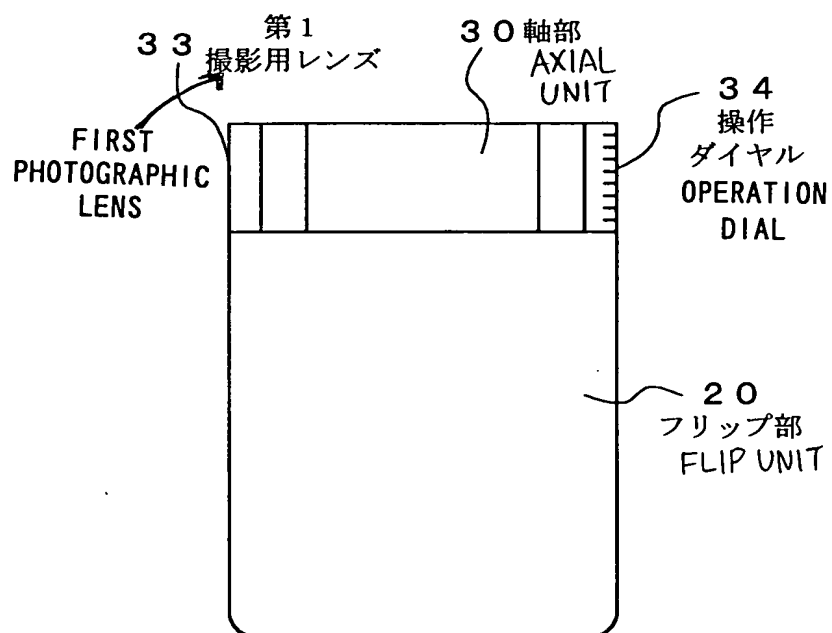


【図5】 FIG. 5

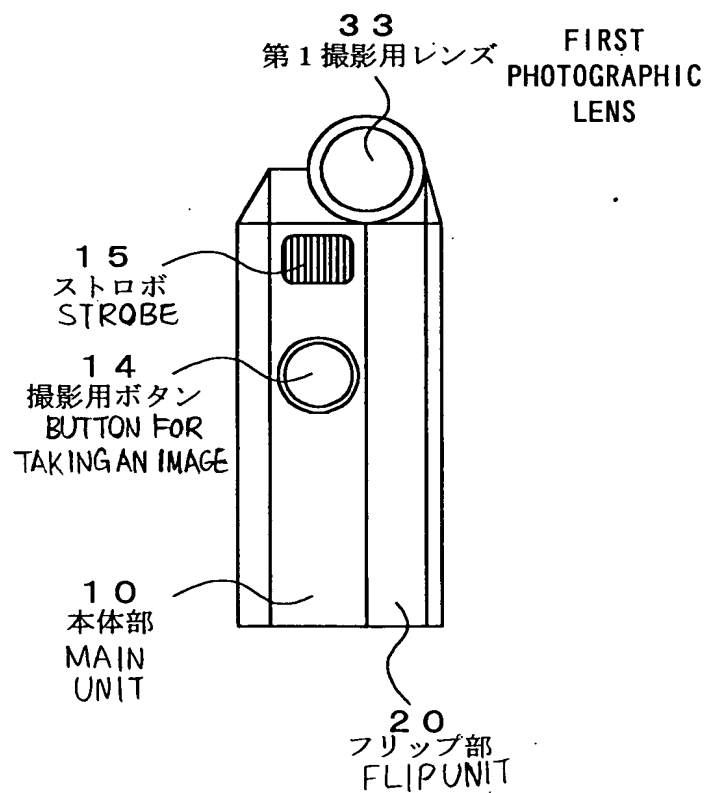


【図6】 **FIG. 6**

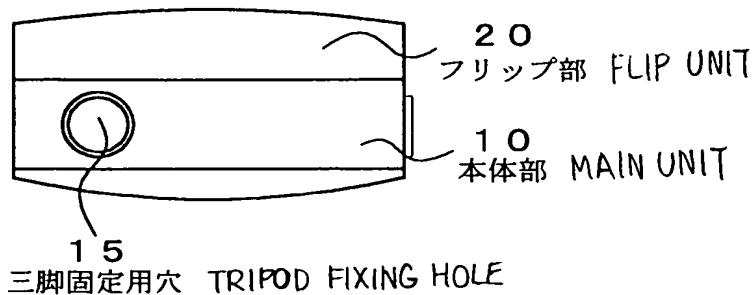


【図7】 **FIG. 7**

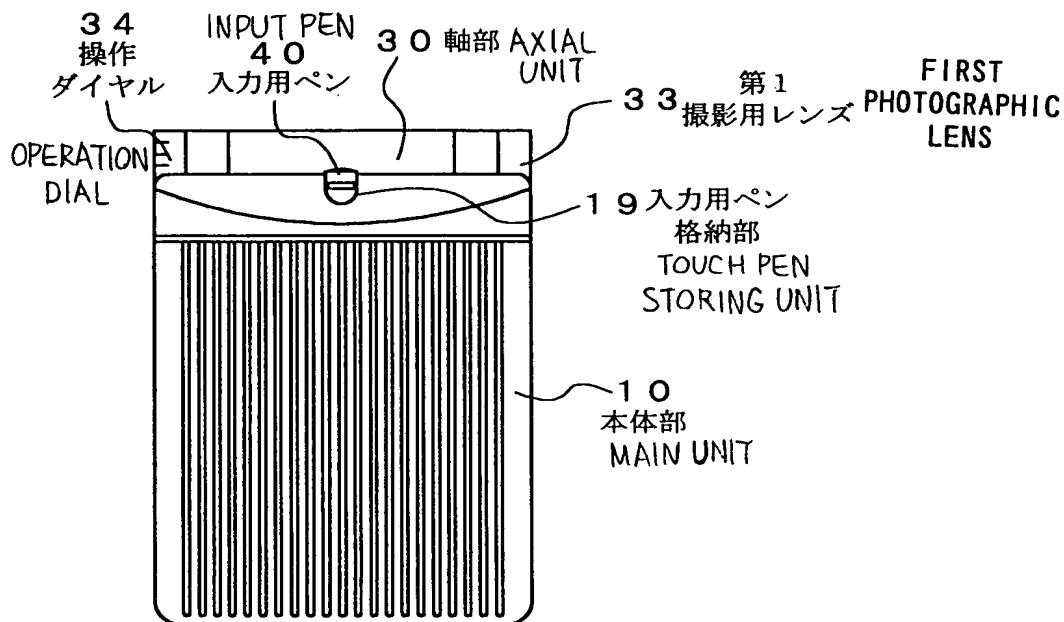


【図8】 **FIG. 8**

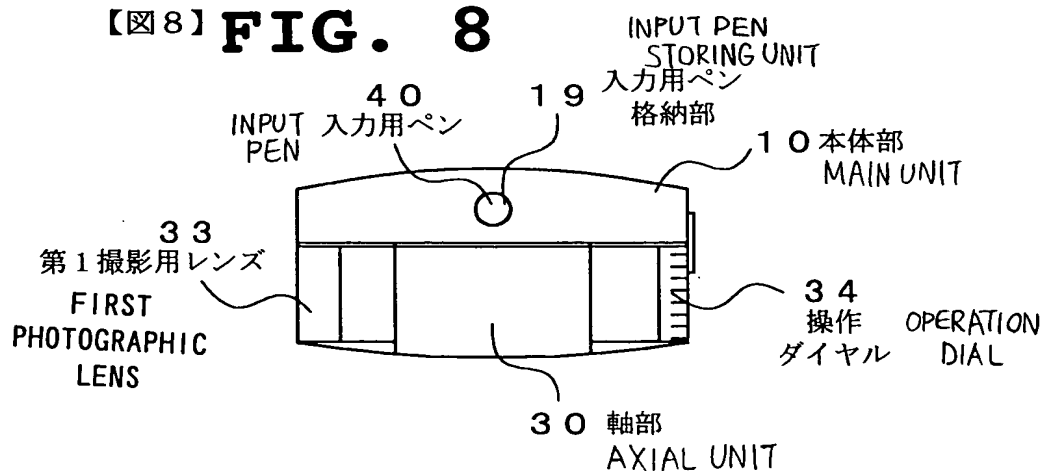


【図9】 **FIG. 9**

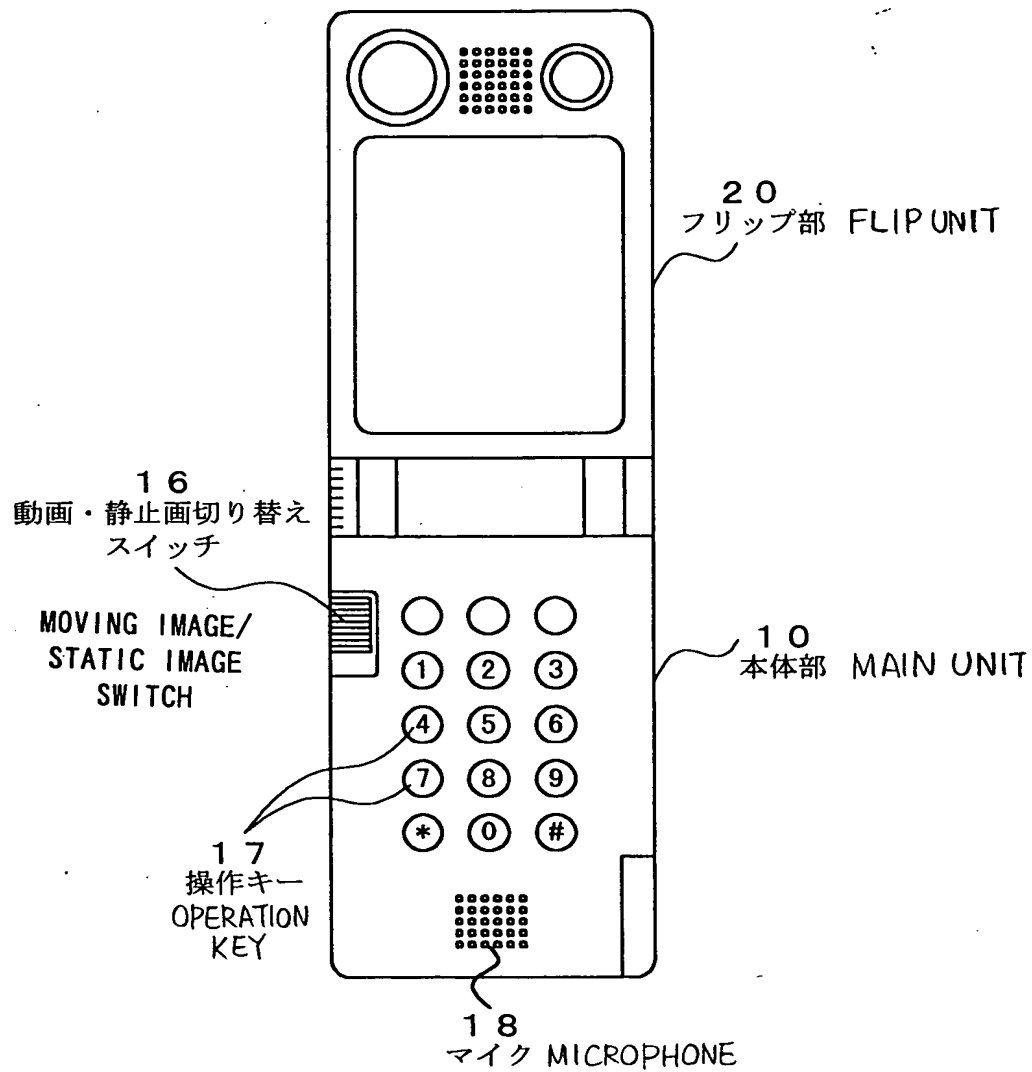


【図10】 **FIG. 10**

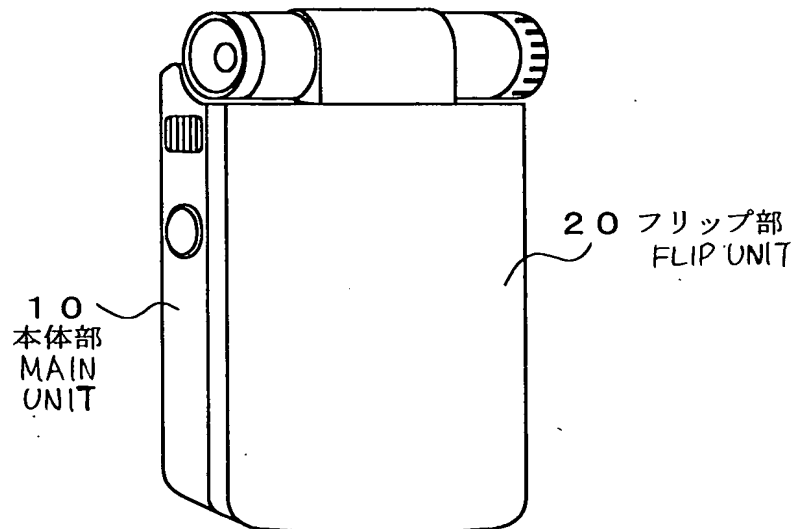


【図11】 **FIG. 11**

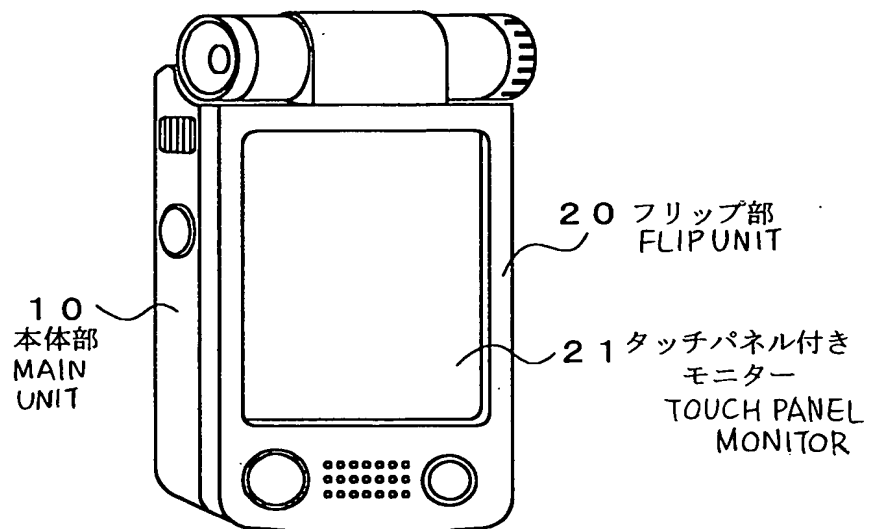


【図12】
FIG. 12

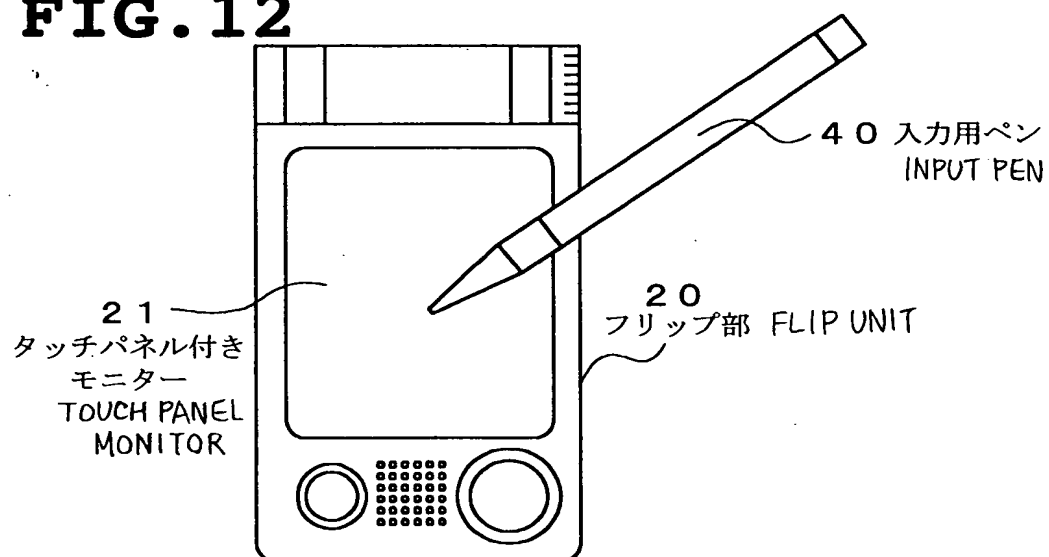


【図 13】
FIG. 13

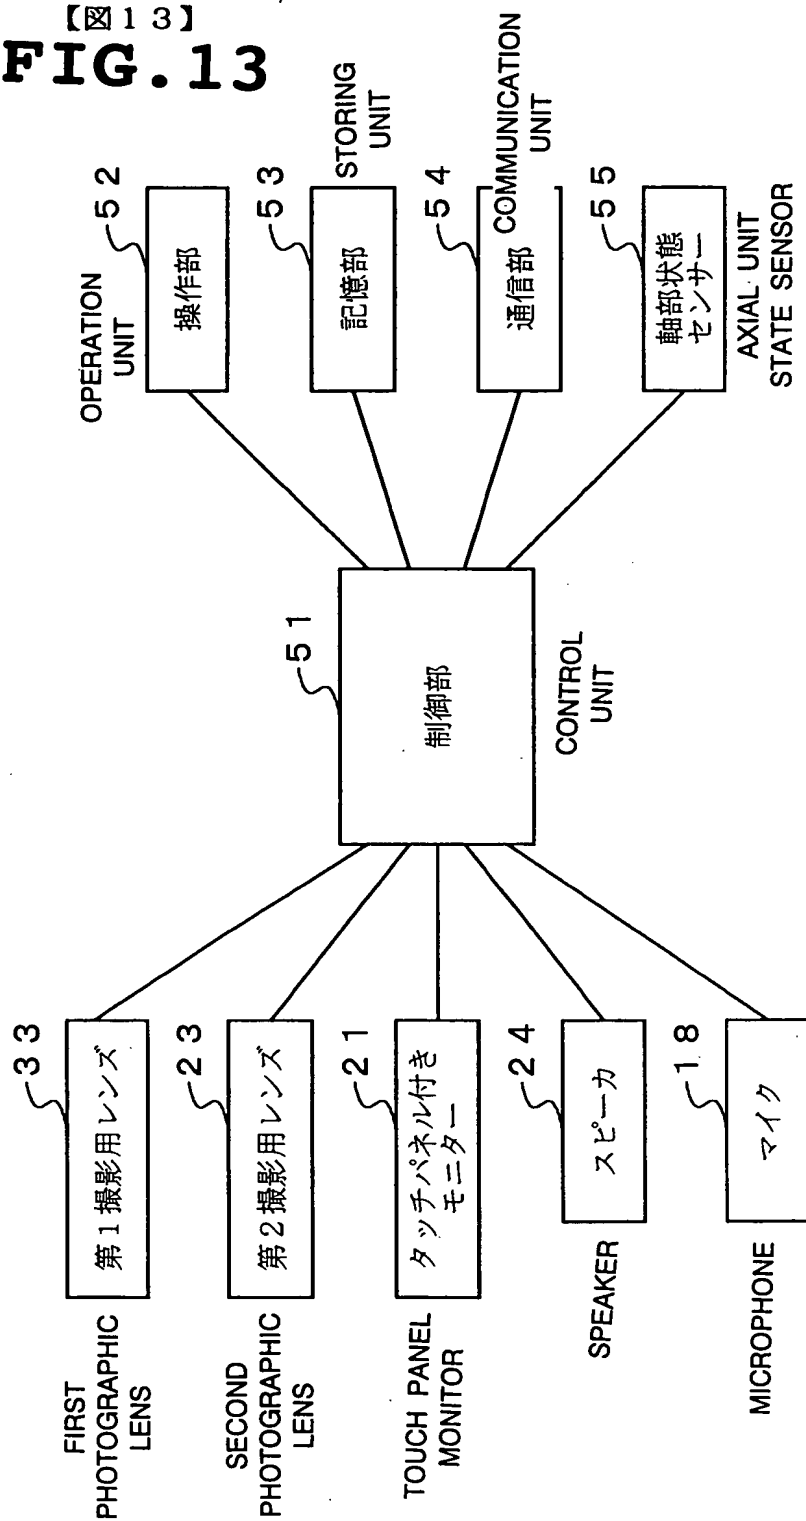

【図14】FIG. 14

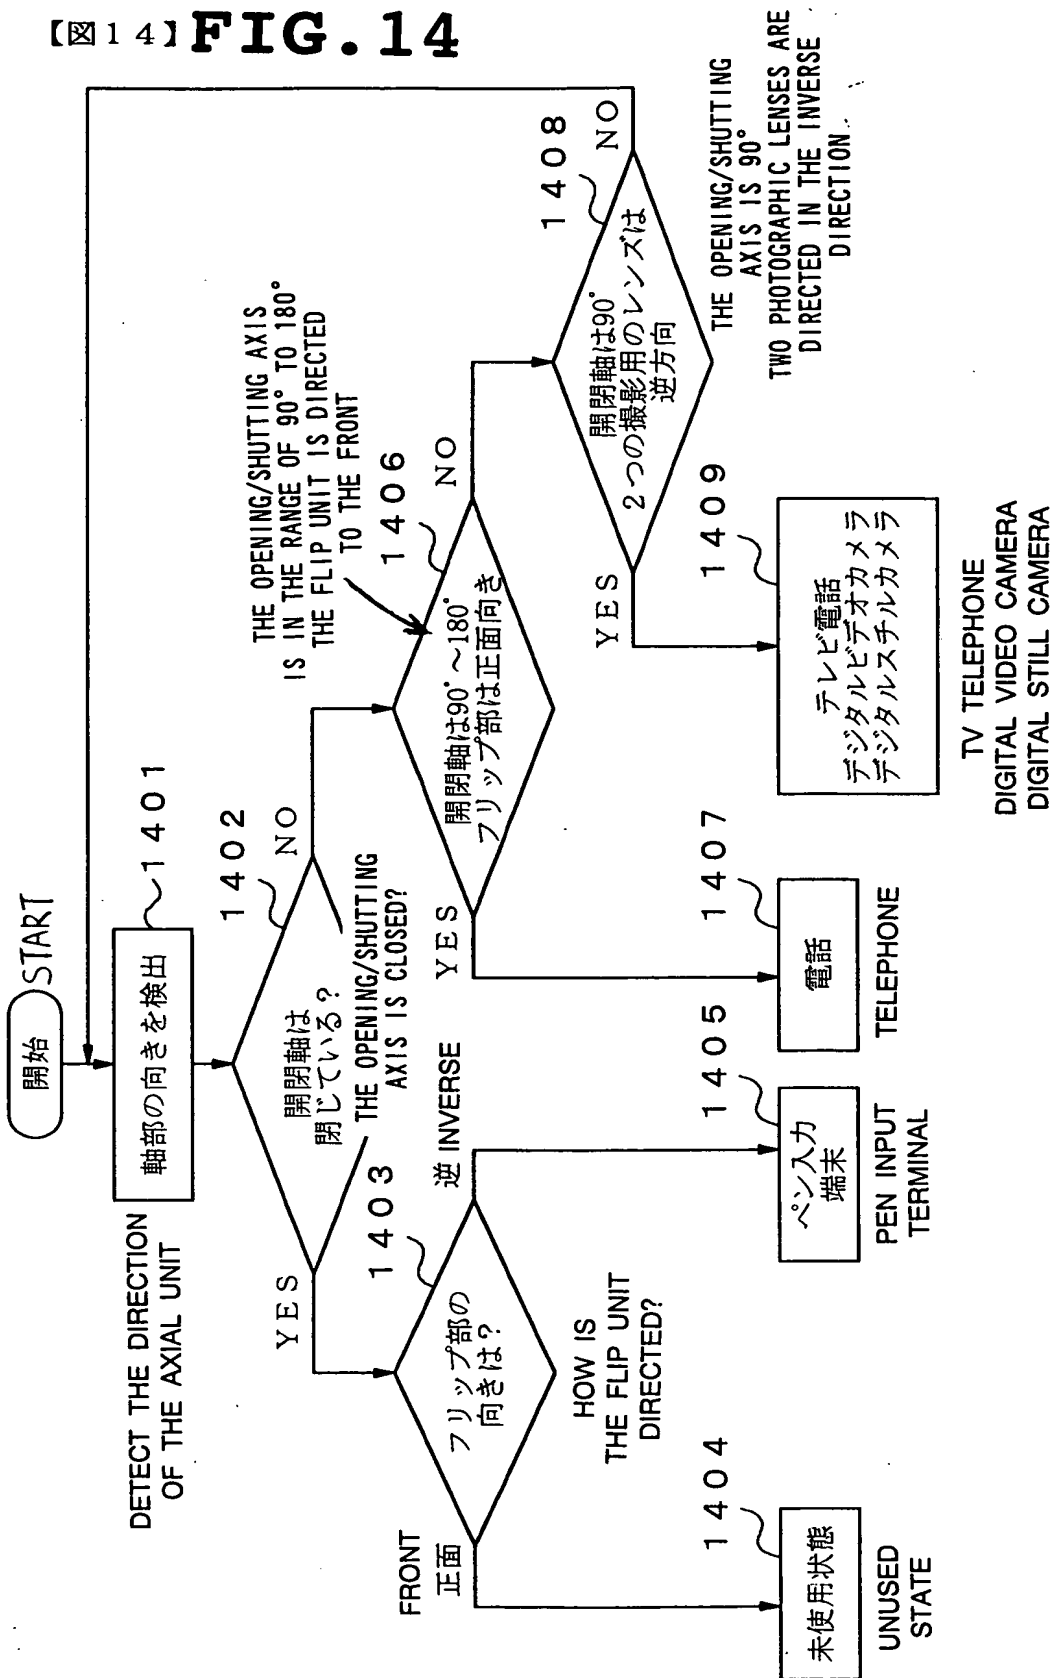

【図15】 **FIG. 15**

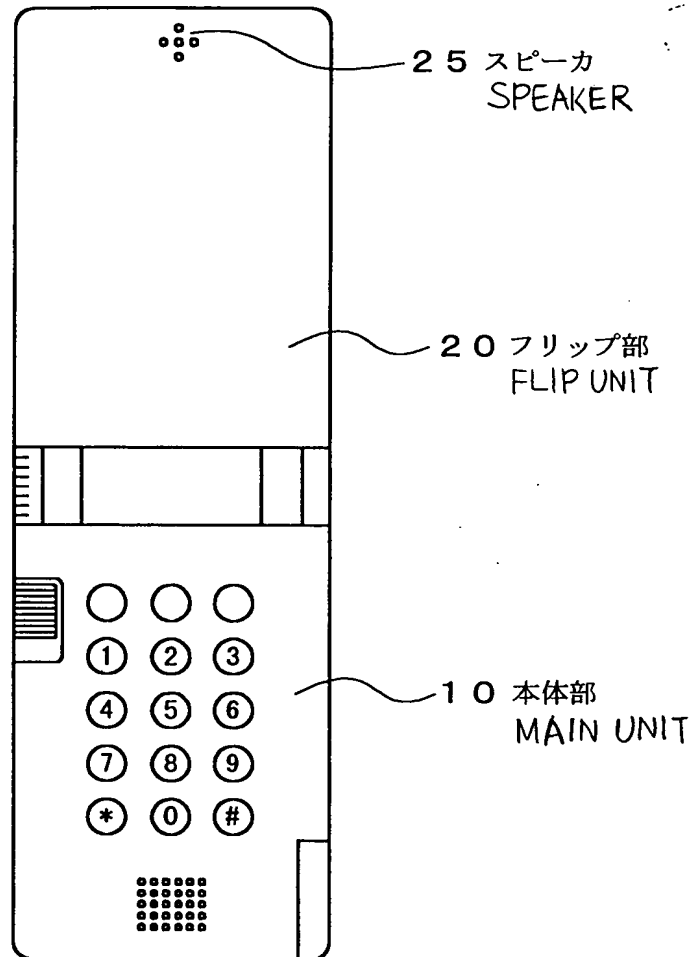

【図16】
FIG. 16

